


1/A9.0 - Existing Elevation

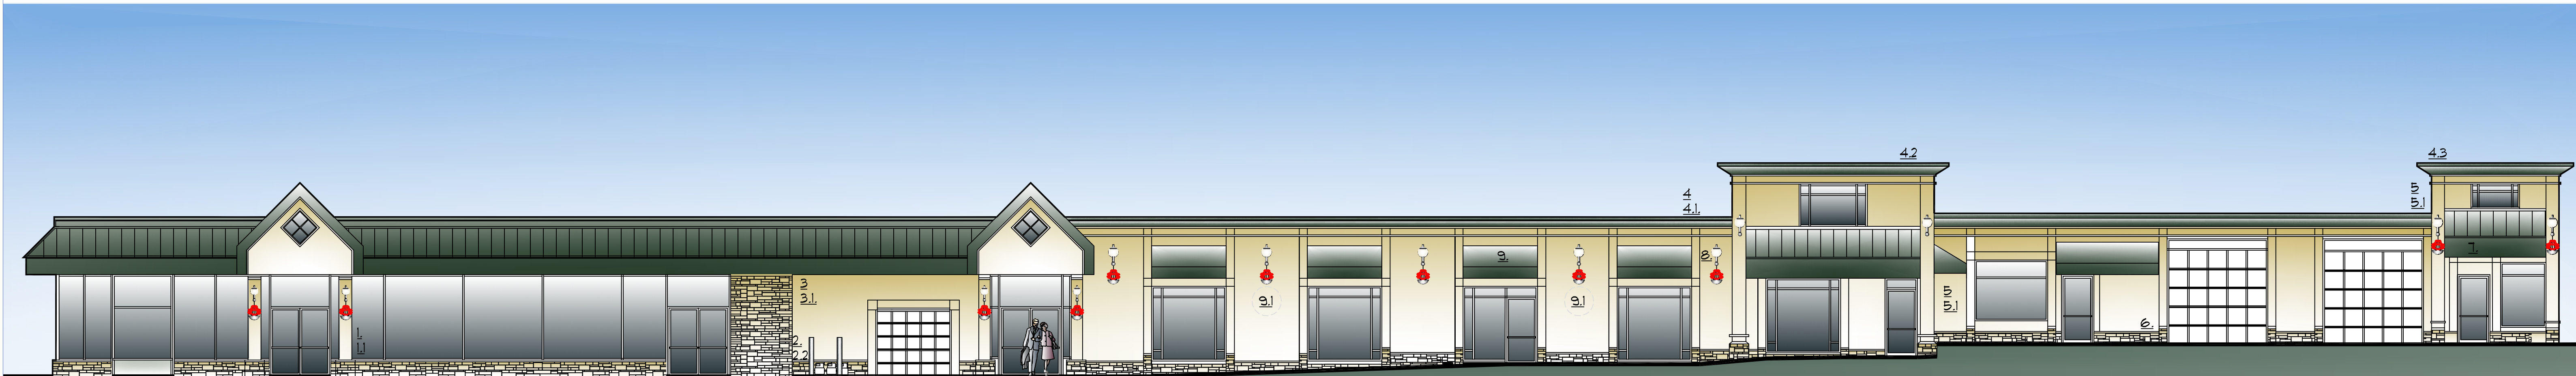

2/A9.0 - Proposed Elevation

- General Notes: (Applies to all sheets)
- 1. See notes on previous sheets.
 - 2. All the work indicated on this sheet will be an add-alternate.


Additional Key Notes: (Specific to this sheet)

- 1.] Veneer stone base will be constructed of cold formed galvanized 6" studs with cement boards and completed as indicated on note 2.]. The shaft will be constructed of galvanized 6" studs, and the exterior completed with E.I.F.S. The capital will be formed with E.I.F.S. to match existing details. The front entry feature will receive base, column and decorative light planters.
- 2.] Two feet high veneer stone over expanded metal lath, type S scratch coat and setting bed with 2" flagstone cap - match existing.
- 3.] Remove existing end and standing seam to integrate the

- Additional Key Notes: (Continued)
- extended portion of the prefinished canopy. Match existing structure and finish details. Patch, repair and blend to yield an appearance of continuity.
- 4.] Remove or modify existing coping to increase depth and match parapet of existing metal canopy.
 - 4.2 Remove or modify and add prefinished metal to existing cornice coping to increase depth of prefinished metal as depicted.
 - 4.3 Match modified cornice and coping as described in keynote 4.2.
 - 5.] Extend E.I.F.S. - match existing details, unless otherwise noted.
 - 6.] Provide decorative bracket, drip irrigation, plant & all service required. For light information see note 7.1 on A1.0 & detail 3/A9.0.
 - 9.] Relocate existing circular signs.

- Key Notes:
- 1. E.I.F.S. column with stone veneer base.
 - 2. Stone veneer to match existing stone.
 - 3. Extend metal roof over to existing entry feature.
 - 4. Metal coping to match existing metal roof color and material.
 - 5. Extend E.I.F.S. features.
 - 6. Extend E.I.F.S. field and match E.I.F.S. color.
 - 7. Metal awning to match existing metal, metal framing and color.
 - 8. Architectural lights with plant baskets - see note 7.1 on A1.0.
 - 9. Rubberized canvas awnings.

Menlo outdoor wall light by Destination Lighting or approved equal. Mount above plant basket.

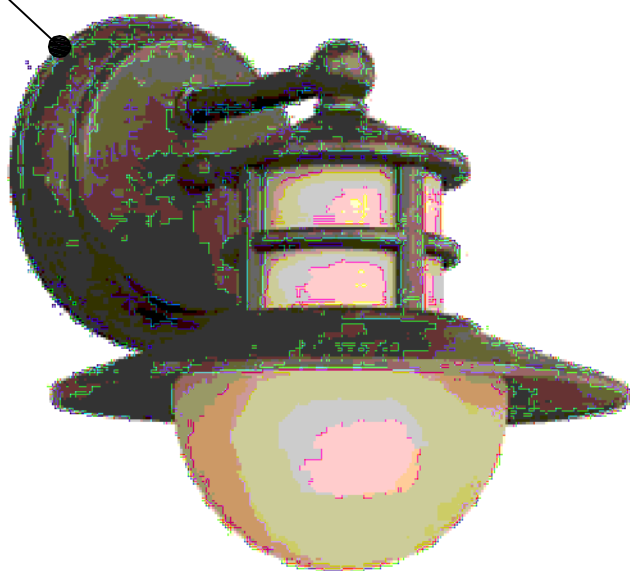


3/A9.0 - Wall Light
Not to Scale

Elevations: 1/8"=1'- 0"
Existing Remodeled - Add Alternate #7

FPEA Proposal - Vienna/
Arrington Properties, LLC
Vienna, VA 22180

Paul Layer Architecture
317 Windover Ave., NW
Vienna, VA 22180
Tel: 703-507-2814
Fax: 703-319-9222



A
9.0